


KN35

CRAWLER EXCAVATOR

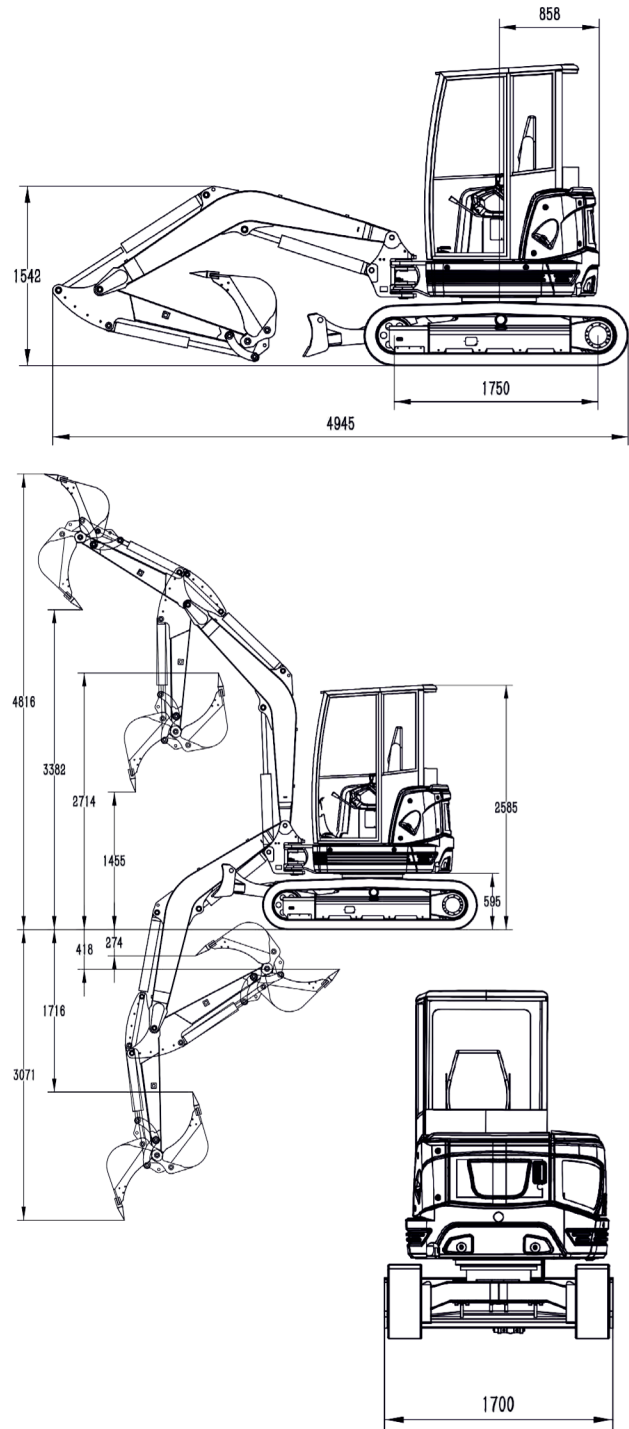

SPECIFICATION		
Operating weight		3850kg
Bucket capacity		0.12m³
Working device form		Backhoe
Engine	Brand	Kubota D1703
	Rated power / rpm	18.2Kw/2200r/min
	Max. torque	51.9N.m
Speed	Max.travel speed	L2.3 & H4 km/h
	Swing speed	9.5rpm
	Max. Gradeability	30°
Track	Ground pressure	33.9KPa
	Material	Rubber / steel track
	Type of tensioner	Grease cylinder
Hydraulic and liquid capacity	Pump type	Variable piston pump
	Working pressure	24.5MPa
	Flow rate	88L / min
	Hydraulic oil tank	41L
	Fuel tank	40L

DIMENSIONS		
Track length on ground	mm	1750
Track length	mm	2163
Upper chassis ground clearance	mm	595
Counterweight turning radius	mm	858
Chassis width	mm	1700
Track width	mm	300
Track height	mm	465
Transportation length	mm	4945
Height of seat to ground	mm	1542
Overall height	mm	2585
Boom swing – left	mm	72°
Boom swing – right	mm	44°

OPERATING RANGE		
Max. digging radius on ground	mm	5575
Max. digging radius	mm	5825
Max. digging depth	mm	3320
Max. digging height	mm	5045
Max. dumping height	mm	3520
Max. vertical digging depth	mm	2860
Min. turning radius	mm	2265
Max. lifting height dozer blade	mm	376
Max.depth dozer blade	mm	385

KAISAN
BETTER WORLD, BETTER KAISAN



Alibaba Shop

SHANDONG KAISAN MACHINERY CO., LTD

International Finance Centre, Dongchang road
Liaocheng, Shandong, China
+86 18063511009
info@kaisanmachinery.com
www.kaisanmachinery.com

(We reserve the right to improve or withdraw the specification or products without prior notice.)

263 653 187
917 412 154
938 450 894



KN35
ULTRA-COMPACT

Engine Brand **KUBOTA D1703**
Bucket capacity **0.12CBM**
Operating weight **3850KG**